
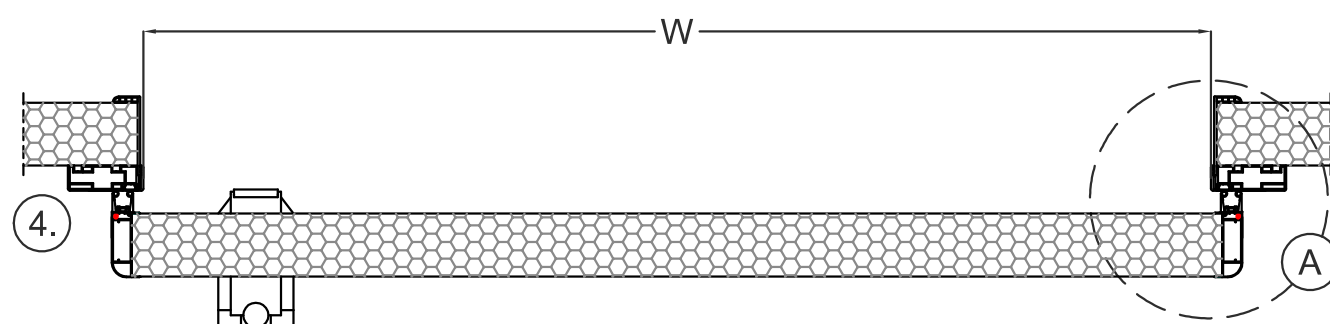


⓪-1 Wall guide (Optional)

Double floor gasket!

"A" section  
M1:4

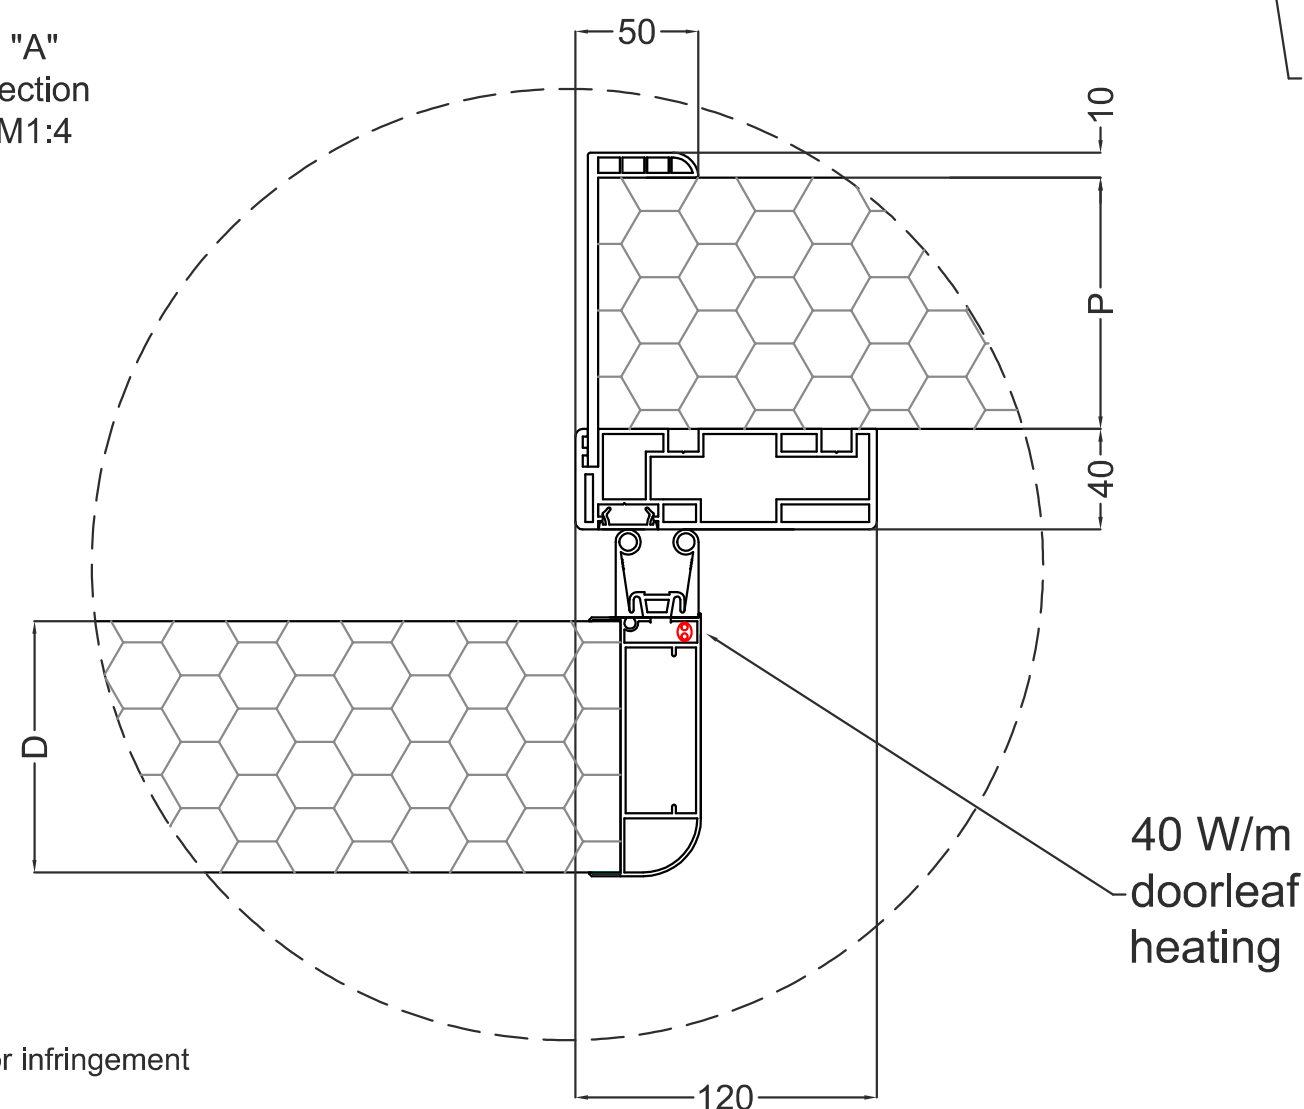

- D - Doorleaf thickness 100 mm
  - H - Clear opening height
  - W - Clear opening width
  - P - Panel thickness
  - PVC inner frame up to 150 mm
  - Powder coated steel profile over 150 mm
  - Ⓟ Sliding door hardware
  - Ⓠ Doorleaf heating (40 W/m)
- Cut out size for frame  
W+20 mm  
H+10 mm

Tárgy: <b>IglooDoors® IDS100 -18/-24°C</b>		 <b>Hűtőépítő Kft.</b> 3200 Gyöngyös Kenyérgyár út 9. 06 37 737 500
Dátum: 2024.01.02	Ajánlati ref.:	
Tervező: Istvánfy András	Oldalak: 1/1 oldal	

IglooDoors® products are protected by RCD (Registered Community Design) rights, unauthorized replication of the products or infringement of the design right may result in legal consequences.  
 IglooDoors® products are equipped with a valid National Technical Assessment supported by accredited tests from ÉMI.